


TSC 80 RADIAL CONVEYOR



FEATURES & BENEFITS

Terex Ecotec's TSC 80 radial conveyor is designed to be one of the most cost efficient and effective ways of stockpiling material on the market. Available in either Pit or Road towable variants, the TSC 80 offers a variety of different options which means it can meet the requirements of almost all applications. This simple but efficient radial conveyor is available in both electric and hydraulic drive systems and can be tailored to meet operator needs.

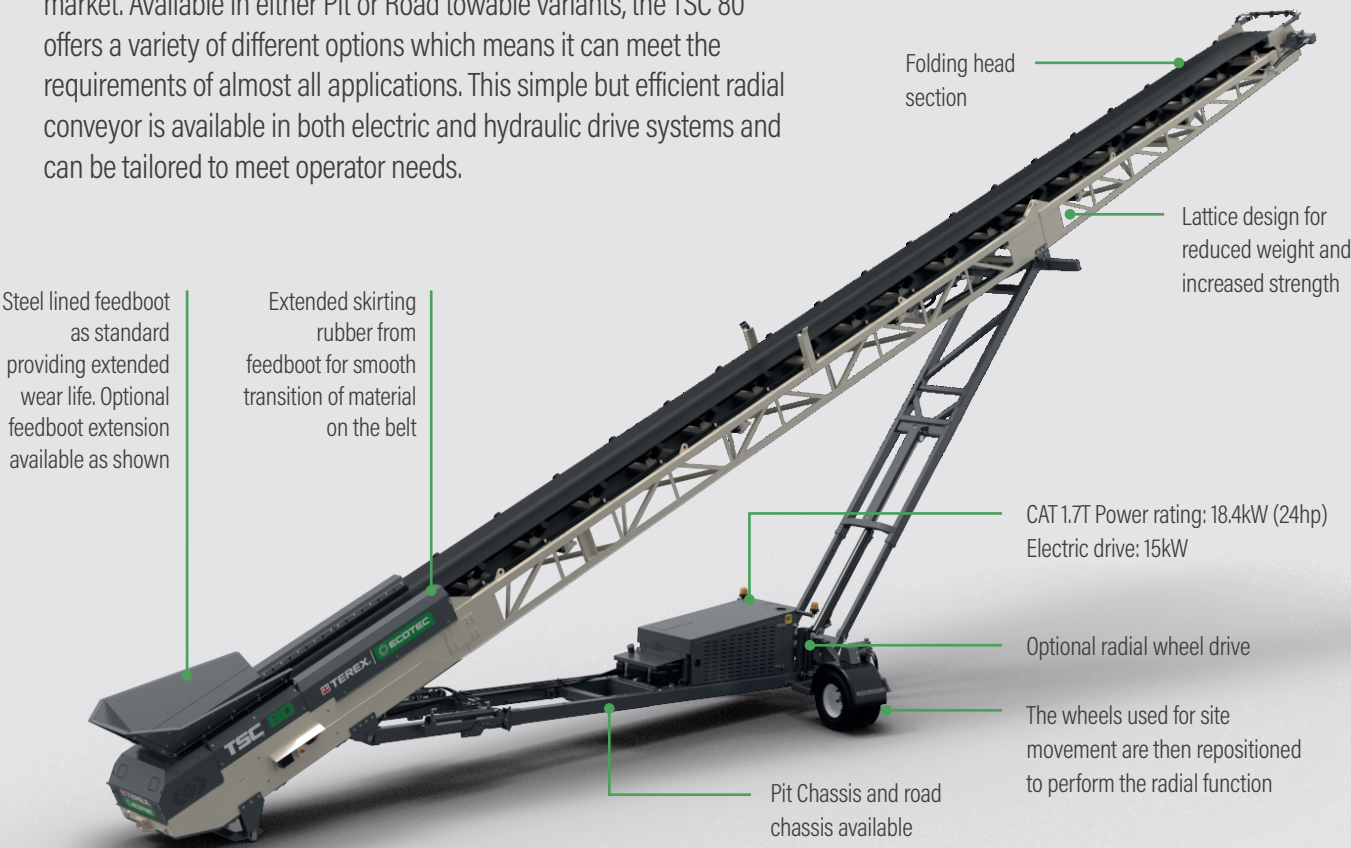

TRANSPORT DIMENSIONS	ROAD TOWABLE (US Only)	PIT PORTABLE
Length	16.17m (52' 11")	16.55m (54' 3")
Width	2.5m (8' 3")	3.1m (10' 2")
Height	3.36m (11')	3.95m (12' 11")
Max Weight (with full options):	10,000kgs (22,046lbs)	
Containerised shipping	2x TSC 80 per 40' x 9' 6" High Cube Container	

CONVEYOR DETAILS	TSC 80 RADIAL
Discharge conveyor length	22.85m (74' 10")
Belt width	914mm (36")
Max. discharge height	9.95m (32' 7") @ 23°
Production capacity	Up to 300 TPH (336 US TPH)

OPTIONS*
Pull cord E-Stop
Feedboot Lined 6mm wearplate
Feedboot extensions
Chevron Belt
Heavy Duty Belt
Conveyor underguard length of mid-section
Canvas dust covers
Hydraulic angle adjust
Hydraulic fold over for transport
Hydraulic axle jacking legs (Std. with Road Chassis)
Single radial wheel drive
Spray bar at head drum
Low level greasing
Telematics